


## Shenzhen Fedy Technology Co., Ltd

#### **Package Dimensions**




Materal' s Pictcure

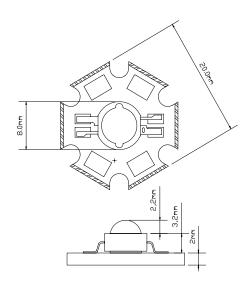

#### Notes

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25$ mm(0.010") unless otherwise noted.
- 3. Protruded resin under flange is 1.0mm(0.04") max.
- 4. Lead spacing is measured where the leads emerge from the package.
- 5. Specifications are subject to change without notice.

#### **Spatial Distribution**

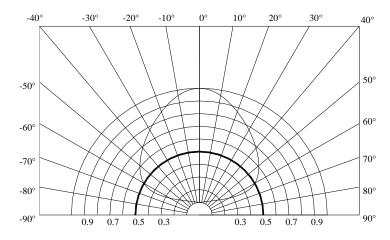

PART NUMBER	REV	PAGE	DATE
FD-3RGB-Y2	R101	1/4	2009-04-03

# FEDY<sup>®</sup> Shenzhen Fedy Technology Co., Ltd

## Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Red	Green	Blue	Unit	<b>Test Condition</b>
Luminous Intensity	Φ	40	55	15	lm	IF =350mA
Viewing Angle	2 θ 1/2	120	120	120	deg	IF =350mA
Spectral Line Half-Width	Δλ	625	525	465	nm	IF =350mA
Forward Voltage	VF	2.50	3.60	3.60	V	IF =350mA
Reverse Current	IR	20	20	20	μА	VR = 5V

### Absolute Maximum Ratings at TA=25℃


Parameter	Maximum Rating
Power Dissipation	3W
Peak Forward Current	
(1/10 Duty Cycle, 0.1ms Pulse Width)	1000mA
Continuous Forward Current	350mA
Derating Linear From 30℃	0.8mA/℃
Reverse Voltage	5V
Operating Temperature Range	-20°C to +80°C
Storage Temperature Range	-30°C to + 100°C
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds

PART NUMBER	REV	PAGE	DATE
FD-3RGB-Y2	R101	2/4	2009-04-03

# Shenzhen Fedy Technology Co., Ltd

#### Remarks

- 1. H602S has ESD protection but customers must not use in reverse condition.
- 2. All the data or technical arguments represent a statistical calculation due to manufacturing process. Those do no correlated to actual parameter of each product line. And all the data may
- 3. Brightness groups are tested at current pulse duration of 100 ms and a tolerance of  $\pm$  15%.
- 4. Chromaticity coordinates groups are tested under pulse duration 100ms.
- 5. Forward voltage are at condition of pulse of 100ms and tolerance of  $\pm$  0.1V.
- 6. LED's lifetime will be effected if the heat generated during operation does not dissipate efficiently. So the good thermal management must be implemented seriously.
- 7. Do not open the bag until ready to use.
- 8. Storage temperature should be in 300C and humidity under then 90%.
- 9. When open the condition should be temperature under 300C and humidity under 70%
- 10. When bag open the devices should be use in 120 hours (5 days).
- 11. Planck Locus in chromaticity coordinates.

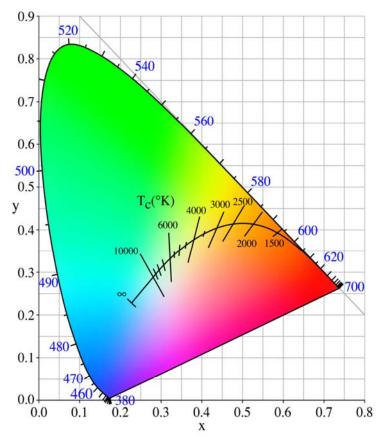



PART NUMBER	REV	PAGE	DATE
FD-3RGB-Y2	R101	3/4	2009-04-03




## Shenzhen Fedy Technology Co., Ltd


#### **HIGH POWER LED Typical Electro-Optical Characteristics Curves**

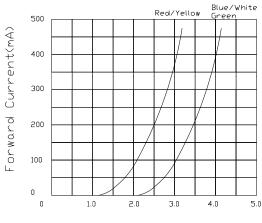


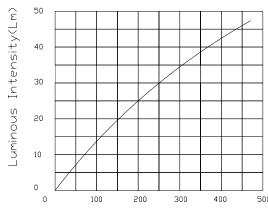



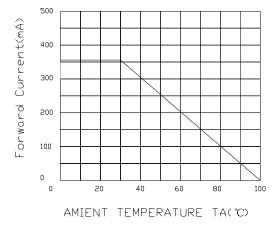

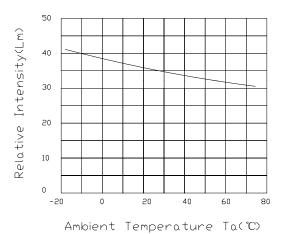

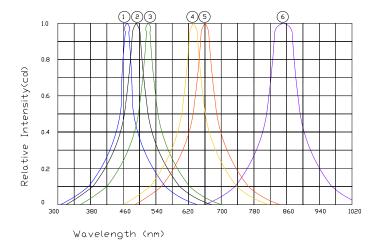

- Blue Lamp(InGaN)
  White Lamp(InGaN)
  Pure Green Lamp(InGaN)
  Yellow Green Lamp(AlInGaP)
- 6 Infrared Lamp(850nm)

PART NUMBER	REV	PAGE	DATE
FD-3RGB-Y2	R101	4/4	2009-04-03